

## SLOTTED ANGLE

### SLOTTED ANGLE 30 x 30 x 2.5mm

- Finish: Electrogalvanized
- light-medium applications
- For constructing fire pipe or HVAC ducting routes




### SLOTTED ANGLE 50 x 50 x 4.5mm

- Finish: Electrogalvanized
- light-medium applications
- For constructing fire pipe or HVAC ducting routes



SPAN (mm)	Max. Allowable Load(KN)
250	1.6
500	1
750	0.65
1000	0.55
1250	0.45
1500	0.4
1750	0.35
2000	0.3
2250	0.25
2500	0.2
2750	0.11
3000	0.1

SPAN (mm)	Max. Allowable Load(KN)
250	11
500	5.5
750	3.6
1000	2.7
1250	2.1
1500	1.8
1750	1.5
2000	1.3
2250	1.1
2500	1
2750	0.9
3000	0.9

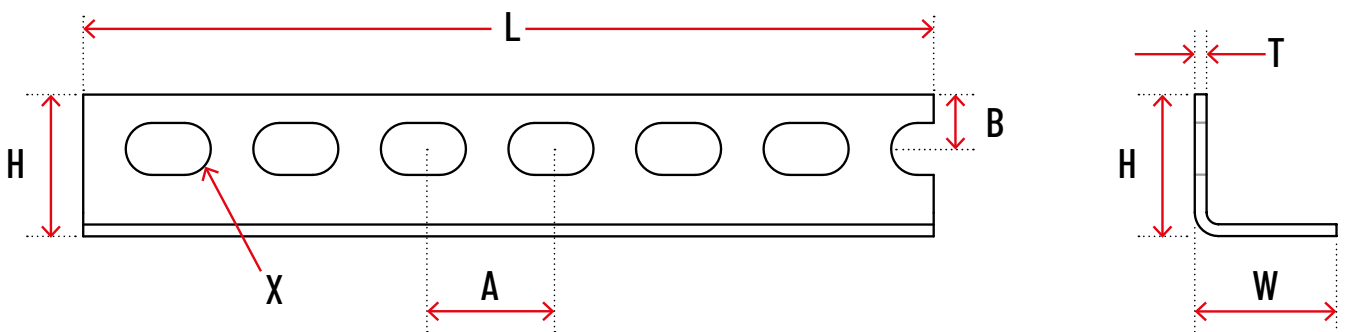

Product code	Length (L)	Height (H)	Width (W)	Thickness (T)	A	B	C
OZ08ASL3030	3,000 mm	30 mm	30 mm	2.5 mm	27 mm	11.5 mm	11 x1 8 mm
OZ08ASL5050	3,000 mm	50 mm	50 mm	4.7 mm	50 mm	19.5 mm	14 x 30 mm