


## CHANNEL – BACK TO BACK



### Available Finishes

Comes in a variety of finishes including Hot Dipped Galvanised, 316 Grade Stainless Steel and can be Powder Coated to Order.

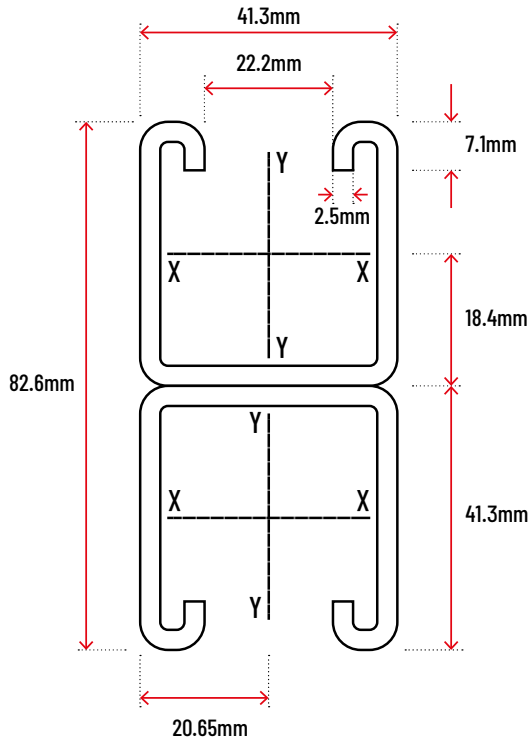

Strut Type	Beam Span or Unsupported Column Height(mm)	Max Beam Working Load (kN)	Deflection at Max Working Load (mm)	Column Max. Loading (kN)
OZ01A1001	250	2.560	0.1	9.769
OZ01A1001	500	1.955	0.52	9.411
OZ01A1001	750	1.308	1.1	8.836
OZ01A1001	1000	0.981	2.01	8.092
OZ01A1001	1250	0.785	3.13	7.226
OZ01A1001	1500	0.653	4.5	6.291
OZ01A1001	1750	0.561	6.11	5.343
OZ01A1001	2000	0.490	8.02	4.421
OZ01A1001	2250	0.437	10.13	3.561
OZ01A1001	2500	0.396	12.53	2.885
OZ01A1001	2750	0.359	15.05	2.383
OZ01A1001	3000	0.323	18.05	2.002