


## CHANNEL – BACK TO BACK



### Available Finishes

Comes in a variety of finishes including Hot Dipped Galvanised, 316 Grade Stainless Steel and can be Powder Coated to Order.

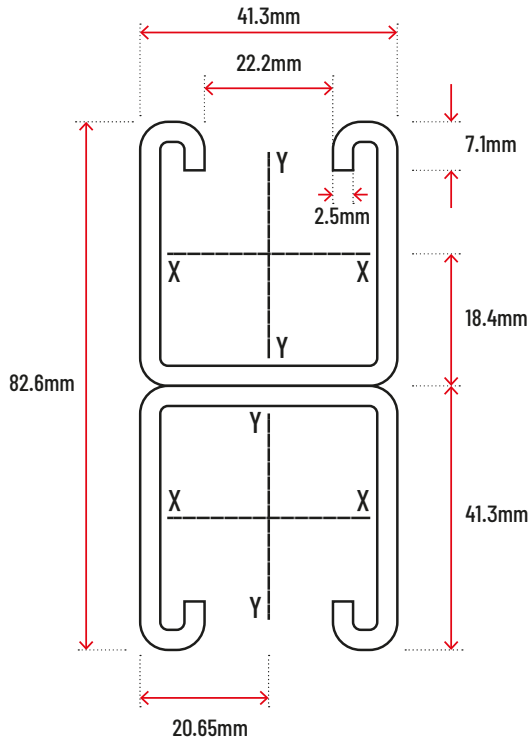

Strut Type	Beam Span or Unsupported Column Height(mm)	Max Beam Working Load (kN)	Deflection at Max Working Load (mm)	Column Max. Loading (kN)
OZ01A1001	250	25.60	0.1	97.69
OZ01A1001	500	19.55	0.52	94.11
OZ01A1001	750	13.08	1.1	88.36
OZ01A1001	1000	9.81	2.01	80.92
OZ01A1001	1250	7.85	3.13	72.26
OZ01A1001	1500	6.53	4.5	62.91
OZ01A1001	1750	5.61	6.11	53.43
OZ01A1001	2000	4.90	8.02	44.21
OZ01A1001	2250	4.37	10.13	35.61
OZ01A1001	2500	3.96	12.53	28.85
OZ01A1001	2750	3.59	15.05	23.83
OZ01A1001	3000	3.23	18.05	20.02